


LINEA **AZUL**: HOJA DE DATOS



MODELO:

CTEA  SOLO FRIO

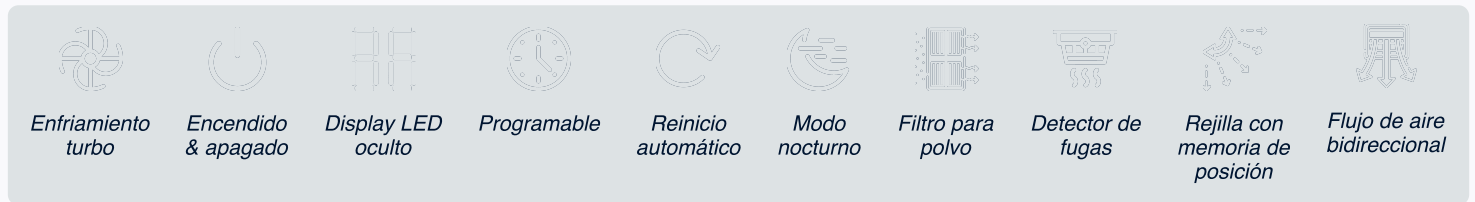

LINEA AZUL			BAM121CTEA	BAM181CTEA	BAM241CTEA	BAM361CTEA
Suministro Eléctrico		V, Ph, Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz
Máximo consumo de entrada		W	1635	2470	2870	4800
Corriente máxima		A	7.7	10.9	14.6	22.0
Tipo de refrigerante		g	R410A/490g	R410A/870g	R410A/1100g	R410A/1650g
Enfriamiento	Capacidad	Btu/h	12000	18000	24000	36000
	Input	W	1255	1900	2530	3870
	Consumo de corriente	A	5.9	8.4	11.2	18.0
	SEER	W/W	12.00	12.00	12.00	11.70
Calefaccion (*modelos HTEA)	Capacidad	Btu/h	--	--	--	--
	Input	W	--	--	--	--
	Consumo de corriente	A	--	--	--	--
	COP	W/W	--	--	--	--
Unidad interior	Nivel de ruido (alto, medio, bajo)	dB(A)	40/37/34	46/43/40	50/47/44	51/48/45
	Dimensión (ancho*profundo*alto)	mm	777×250×201	910×294×206	1010×315×220	1186×340×258
	Empaque (ancho*profundo*alto)	mm	840×315×260	979×372×277	1096×390×297	1262×420×337
	Peso con empaque	Kg	8	10	13	16
Unidad exterior	Nivel de ruido exterior	dB(A)	51	58	60	58
	Dimensión (ancho*profundo*alto)	mm	777×290×498	817×300×553	886×357×605	920×380×699
	Empaque (ancho*profundo*alto)	mm	818×325×520	858×356×585	910×392×633	960×430×732
	Peso con empaque	Kg	25	33	40	55



LINEA AZUL: HOJA DE DATOS



MODELO:

HTEA  FRIO Y CALOR



LINEA AZUL			BAM120HTEA	BAM121HTEA	BAM181HTEA	BAM241HTEA
Suministro Eléctrico		V, Ph, Hz	115V,1Ph,60Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz
Máximo consumo de entrada		W	1310	1590	2470	3290
Corriente máxima		A	13.2	7.5	10.9	14.6
Tipo de refrigerante		g	R410A/600g	R410A/600g	R410A/1260g	R410A/1400g
Enfriamiento	Capacidad	Btu/h	12000	18000	24000	36000
	Input	W	1255	1900	2530	3870
	Consumo de corriente	A	5.9	8.4	11.2	18.0
	SEER	W/W	12	12	12	12
Calefacción (*modelos HTEA)	Capacidad	Btu/h	12500	12500	18500	25000
	Input	W	1220	1220	1880	2300
	Consumo de corriente	A	11.1	5.8	8.3	10.2
	COP	W/W	3.00	3.00	3.00	3.00
Unidad interior	Nivel de ruido (alto, medio, bajo)	dB(A)	41/37/34	40/37/34	46/43/40	50/47/44
	Dimensión (ancho*profundo*alto)	mm	777x250x201	777x250x201	910x294x206	1010x315x220
	Empaque (ancho*profundo*alto)	mm	840x315x260	840x315x260	979x372x277	1096x390x297
	Peso con empaque	Kg	8	8	10	13
Unidad exterior	Nivel de ruido exterior	dB(A)	51	51	58	58
	Dimensión (ancho*profundo*alto)	mm	777x290x498	777x290x498	817x300x553	886x357x605
	Empaque (ancho*profundo*alto)	mm	818x325x520	818x325x520	858x356x585	910x392x633
	Peso con empaque	Kg	26	26	35	45

